

### FEATURES

- Low profile
- Industry standard footprint
- High temperature seal capabilities
- Excellent shock resistance
- Excellent environmental characteristics
- Tape and Reel (1000 pcs)

### SMD QUARTZ CRYSTAL

This wide frequency range SMD quartz crystal is an excellent choice for surface mount applications. The ruggedized molded package is made from the same thermoplastic that is industry standard for integrated circuits.

### PART NUMBERING GUIDE “EXAMPLE”

PART NUMBER	LOAD CAPACITANCE*	TAPE & REEL	FREQUENCY
SMDC	- 20	R	- 6.144 MHz

\* Load capacitance (xx=xx pF, S= series resonance)

### OPERATING CONDITIONS/ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
FREQUENCY RANGE	$f_0$	3.57		70.00	MHz
SHUNT CAPACITANCE	$C_0$			7.0	pF
LOAD CAPACITANCE	$C_L$ (Customer Specified)	12	18.0 standard	Series	pF
DRIVE LEVEL	3.50 ~ 70.00MHz			100	$\mu$ W
CALIBRATION TOLERANCE	@ 25°C	-30		+30	PPM
FREQUENCY STABILITY	$\Delta f/f_0$	-50		+50	PPM
OPERATING TEMPERATURE RANGE	$T_{OPR}$	-10		+70	°C
STORAGE TEMPERATURE RANGE	$T_{STG}$	-40		+85	°C

### EQUIVALENT SERIES RESISTANCE / MODE OF OSCILLATION

FREQUENCY RANGE (MHz)	MODE	MAX ESR $\Omega$	FREQUENCY RANGE (MHz)	MODE	MAX ESR $\Omega$
3.570 ~ 3.999	Fundamental	250	9.000 ~ 12.999	Fundamental	60
4.000 ~ 4.999	Fundamental	150	13.000 ~ 19.999	Fundamental	40
5.000 ~ 5.999	Fundamental	120	20.000 ~ 30.000	Fundamental	30
6.000 ~ 6.999	Fundamental	100	30.000 ~ 70.000	3rd O/T	100
7.000 ~ 8.999	Fundamental	80			

### PACKAGE DIMENSIONS (mm)

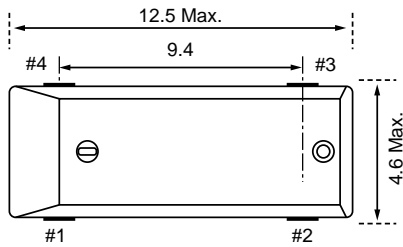


Figure 1) SMDC - Top, Side and End views




Figure 2) Internal Connections - Top view

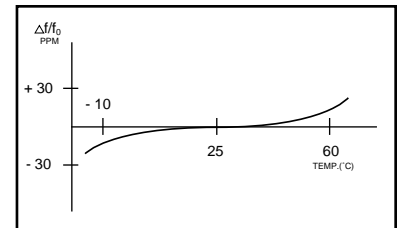


Figure 3) Frequency vs Temperature Curve




Figure 4) SMDC Land Pattern - Bottom view