




# RXDPR314, PR514

## FEATURES

- Programmable (2 Times)
- 3.3 V & 5 V options
- PLL technology
- 14 pin Dip footprint
- Extended temp range



## PROGRAMMABLE CLOCK OSCILLATOR

The RXDPR314 (3.3V) and PR514 (5V) 14 pin DIP, twice programmable crystal controlled oscillator. The standard 14 pin DIP footprint is ideal for existing PC boards.

## PART NUMBERING GUIDE "EXAMPLE"

PART NUMBER	SERIES	STABILITY	TEMP RANGE (OPTION)	FREQUENCY
RXD	PR314	- A	- E	24.576 MHz

Sample Part Number: RXDPR314-A-E 24.576

## OPERATING CONDITIONS/ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	RXDPR314 (3.3V)			RXDPR514 (5V)			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
FREQUENCY RANGE		1.000		125.000	1.000		150.000	MHz
FREQUENCY STABILITY*	Option A			±100			±100	PPM
	Option B**			±50			±50	PPM
OPERATING TEMPERATURE	Standard	-10		+70	-10		+70	°C
	Extended (Option E)	-40		+85	-40		+85	°C
STORAGE TEMPERATURE		-55		+125	-55		+125	°C
INPUT VOLTAGE (Vcc)		+2.97	+3.3	+3.63	+4.5	+5.0	+5.5	VDC
INPUT CURRENT				28			45	mA
OUTPUT SYMMETRY	at 1/2 Vcc Level	40/60		60/40	40/60		60/40	%
RISE AND FALL TIMES	20% Vcc to 80% Vcc			4			4	ns
JITTER	1.0 - 33.0 MHz		±100	±250		±100	±250	pS p-p
	> 33.1 MHz		±50	±100		±50	±100	pS p-p
"0" LEVEL				0.4			0.4	Vdc
"1" LEVEL		2.7			Vcc - 0.5			Vdc
LOAD (HCMOS)	1.0 - 50.0 MHz			30			50	pF
	> 50.1MHz			15			15	pF
ENABLE/DISABLE TIME				150			100	ns
START-UP TIME				10			10	ms

\* Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change aging, shock and vibration.

\*\* Not available with extended range option.

## PACKAGE DIMENSIONS (mm)

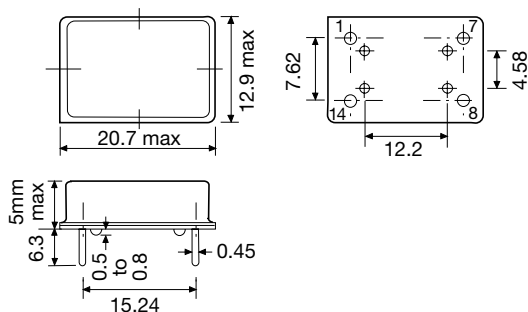


Figure 1) Top, Bottom and Side views

### RXDPR314 (3.3 V) TRI-STATE CONTROL VOLTAGE

PIN #1 = OPEN	#3 = OUTPUT
PIN #1 = +0.7V MIN	#3 = OUTPUT
PIN #1 = +0.2V MAX	#3 = HIGH IMPEDANCE

### RXDPR514 (5 V) TRI-STATE CONTROL VOLTAGE

PIN #1 = OPEN	#3 = OUTPUT
PIN #1 = +2.0V MIN	#3 = OUTPUT
PIN #1 = +0.8V MAX	#3 = HIGH IMPEDANCE

### PIN CONNECTIONS

#1	TRI-STATE
#7	GND
#8	OUTPUT
#14	VCC